

(Contd. on page 2)

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. A

	(Contd. of page 1)			
H411 Toxic to a	quatic life with long lasting effects.			
· Precautionary s	tatements and the second se			
P261	Avoid breathing dust/fume/gas/mist/vapours/spray.			
P280	Wear protective gloves/protective clothing/eye protection/face protection.			
P273	Avoid release to the environment.			
P305+P351+P3	338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.			
P321	Specific treatment (see on this label).			
P308+P313	IF exposed or concerned: Get medical advice/attention.			
P333+P313	If skin irritation or rash occurs: Get medical advice/attention.			
P405	Store locked up.			
P501	Dispose of contents/container in accordance with local/regional/national/international regulations.			
· Additional infor	rmation:			
Contains epoxy	constituents. May produce an allergic reaction.			
· 2.3 Other hazar	ds			
· Results of PBT	and vPvB assessment			
· PBT: Not applie	cable.			

• **vPvB:** Not applicable.

SECTION 3: Composition/information on ingredients

· 3.2 Chemical characterisation: Mixtures

· Description:

Epoxy resin formulation with a bisphenol-A liquid resin base and bisphenol-F liquid resin

CAS: 25068-38-6	reaction product: bisphenol-A-(epichlorhydrin) epoxy resin	10-25%
NLP: 500-033-5	(number average molecular weight = 700)	
Index number: 603-074-00-8	Aquatic Chronic 2, H411; 🚸 Skin Irrit. 2, H315; Eye Irrit.	
Reg.nr.: 01-2119456619-26-xxxx	2, H319; Skin Sens. 1, H317	
CAS: 68611-50-7	Flüssiges Polysulfidpolymer mit Thiolendgruppen (MG < 1800)	10-25%
Polymer	Aquatic Chronic 2, H411	
CAS: 28064-14-4	reaction product: bisphenol-F-(epichlorhydrin)	10-25%
EC number: 608-164-0	🚯 Aquatic Chronic 2, H411; 🚸 Skin Irrit. 2, H315; Eye Irrit.	
Reg.nr.: 01-2119454392-40-xxxx	2, H319; Skin Sens. 1, H317	
CAS: 26761-45-5	Glycidyl neodecanoate	10-25%
EINECS: 247-979-2	🚯 Muta. 2, H341; 🚯 Aquatic Chronic 2, H411; 🚸 Skin	
Reg.nr.: 01-2119431597-33-xxxx	Sens. 1, H317	
CAS: 9003-36-5	Bisphenol F epoxy resin	2.5-10%
NLP: 500-006-8	(Aquatic Chronic 2, H411; (Skin Irrit. 2, H315; Eye Irrit.	
Reg.nr.: 01-2119454392-40-xxxx	2, H319; Skin Sens. 1, H317	
CAS: 100-51-6	Benzyl alcohol	2.5-10%
EINECS: 202-859-9	() Acute Tox. 4, H302; Acute Tox. 4, H332	
Index number: 603-057-00-5		
Reg.nr.: 01-2119492630-38-xxxx		
CAS: 16096-31-4	Hexanedioldigycidyl ether	2.5-10%
EINECS: 240-260-4	🚯 Skin Irrit. 2, H315; Eye Irrit. 2, H319; Skin Sens. 1, H317;	
Reg.nr.: 01-2119463471-41-xxxx	Aquatic Chronic 3, H412	
CAS: 9016-45-9	Nonylphenolpolyglykolether	< 2.5%
NLP: 500-024-6	📀 Eye Dam. 1, H318; 🚯 Aquatic Chronic 2, H411; 🕔 Acute	
Reg.nr.: 01-2119946371-39-xxxx		

Printing date 01.06.2015

Revision: 05.02.2015

(Contd. of page 2)

Trade name: ROMPOX Flexfuge Comp. A

· SVHC

9016-45-9 Nonylphenolpolyglykolether

• Additional information For the wording of the listed risk phrases refer to section 16.

SECTION 4: First aid measures

- 4.1 Description of first aid measures
- · General information Instantly remove any clothing soiled by the product.
- After inhalation Supply fresh air; consult doctor in case of symptoms.
- · After skin contact

Instantly wash with water and soap and rinse thoroughly.

- If skin irritation continues, consult a doctor.
- After eye contact Rinse opened eye for several minutes under running water. Then consult doctor.
- · After swallowing
- Rinse the mouth with water immediately
- Seek immediate medical advice.
- 4.2 Most important symptoms and effects, both acute and delayed No further relevant information available.
- Information for doctor No particular measures are known treat according to symptoms.
- 4.3 Indication of any immediate medical attention and special treatment needed
- No further relevant information available.

SECTION 5: Firefighting measures

· 5.1 Extinguishing media

· Suitable extinguishing agents

CO₂, extinguishing powder or water jet. Fight larger fires with water jet or alcohol-resistant foam.

- · For safety reasons unsuitable extinguishing agents Water with a full water jet.
- · 5.2 Special hazards arising from the substance or mixture
- Can be released in case of fire Carbon monoxide (CO)
- Carbon dioxide (CO2)

Under certain fire conditions, traces of other toxic gases cannot be excluded.

- 5.3 Advice for firefighters
- · Protective equipment: Wear self-contained breathing apparatus.
- · Additional information

Dispose of fire debris and contaminated fire fighting water in accordance with official regulations.

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures Ensure adequate ventilation Wear protective clothing.
6.2 Environmental precautions: Do not allow product to reach sewage system or water bodies. Do not allow to enter the ground/soil.
6.3 Methods and material for containment and cleaning up: Absorb with liquid-binding material (sand, diatomite, acid binders, universal binders, sawdust). Dispose of the material collected according to regulations.
6.4 Reference to other sections Clean the accident area carefully. See Section 13 for information on disposal. See Section 8 for information on personal protection equipment.

(Contd. on page 4)

Printing date 01.06.2015

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. A

(Contd. of page 3)

SECTION 7: Handling and storage

- · 7.1 Precautions for safe handling The usual precautionary measures for handling chemicals must be observed. Keep containers tightly sealed.
- · Information about protection against explosions and fires: No special measures required.
- · 7.2 Conditions for safe storage, including any incompatibilities
- · Storage
- · Requirements to be met by storerooms and containers: Store only in unopened original containers.
- Provide floor trough without outlet.
- · Information about storage in one common storage facility: Store away from foodstuffs.
- · Further information about storage conditions: Keep container tightly sealed.
- Protect from frost.
- · Storage class 10
- · 7.3 Specific end use(s) No further relevant information available.

SECTION 8: Exposure controls/personal protection

• Additional information about design of technical systems: No further data; see item 7.

The product does not contain any relevant quantities of materials with critical values that have to be monitored at the workplace.

25068-38-	6 reaction product: bisphenol-A weight = 700)	A-(epichlorhydrin)) epoxy resin (number average molecular
Oral	DNEL Langzeit Verbraucher / Lo	ong-term consumer	0.75 mg/kg/bw/d (-)
Dermal	DNEL - Arbeiter / worker		8.33 mg/kg/bw/d (-)
	DNEL Langzeit Verbraucher / Lo	ong-term consumer	3.571 mg/kg/bw/d (-)
Inhalative	DNEL Langzeit / long-term		12.25 mg/m ³ (-)
26761-45-	5 Glycidyl neodecanoate		
Dermal	DNEL - Arbeiter / worker		1.4 mg/kg/bw/d (-)
Inhalative	DNEL - Arbeiter / worker		1.965 mg/m ³ (-)
100-51-61	Senzyl alcohol		
Oral	DNEL Langzeit Verbraucher / Long-term consumer		5 mg/kg/bw/d (-)
Dermal	DNEL - Arbeiter / worker		9.5 mg/kg/bw/d (-) ((langfristig))
	DNEL Langzeit Verbraucher / Lo	ong-term consumer	5.7 mg/kg/bw/d (-)
Inhalative	DNEL - Arbeiter / worker		90 mg/m ³ (-) ((langfristig))
DNEL Langzeit Verbraucher / L		ong-term consumer	5.7 mg/m3 (-)
PNECs			
25068-38-	6 reaction product: bisphenol-A weight = 700)	A-(epichlorhydrin)) epoxy resin (number average molecula
PNEC Lan	gzeit Wasser / Long-term water 0	.006 mg/l (Frischw	asser (freshwater))
	0	.006 mg/l (Meerwa	sser (seawater))
26761-45-	5 Glycidyl neodecanoate		
PNEC Lan	gzeit Wasser / Long-term water 0	0.0035 mg/l (Frisch	wasser (freshwater))
	0	.35 mg/l (Meerwas.	ser (seawater))

^{· 8.1} Control parameters

[·] Components with limit values that require monitoring at the workplace:

GB

Trade name: ROMPOX Flexfuge Comp. A

100 81 6 0	(Contd. of page 4
	nzyl alcohol
PNEC Lang	zeit Wasser / Long-term water 1 mg/l (Frischwasser (freshwater))
	0.1 mg/l (Meerwasser (seawater))
Additional i	nformation: The lists that were valid during the compilation were used as basis.
8.2 Exposur	e controls
	otective equipment
General pro	tective and hygienic measures
	From foodstuffs, beverages and food.
	during breaks and at the end of the work.
	ct with the eyes and skin.
	nediately all contaminated clothing
	tive clothing separately. drink or smoke while working.
	tection cream for preventive skin protection.
	<i>quipment:</i> Wear a respirator if an aerosol or mist forms.
	led filter device for short term use:
	Tilter AX
43376	
Protection of	f hands:
	, ,
1.7	Only use chemical-protective gloves with CE-labelling of category III.
The glove m	aterial has to be impermeable and resistant to the product/ the substance/ the preparation.
	f the glove material on consideration of the penetration times, rates of diffusion and th
degradation	
Material of	
Nitrile rubb	
Butyl rubber	
	on rubber (Viton)
	ed thickness of the material: ≥ 0.5 mm of the suitable cloves does not only depend on the material, but also on further marks of such
	n of the suitable gloves does not only depend on the material, but also on further marks of qualit from manufacturer to manufacturer. As the product is a preparation of several substances, th
•	f the glove material can not be calculated in advance and has therefore to be checked prior to th
application.	ne store material can not be calculated in darance and has increjore to be checked phor to m
	time of glove material
	reak trough time has to be found out by the manufacturer of the protective gloves and has to b
observed.	
Not suitable	are gloves made of the following materials:
Strong glove	
Leather glo	
Eye protecti	on:
	ightly sealed safety glasses.
U)	
воду protec	tion: Protective work clothing.

Printing date 01.06.2015

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. A

(Contd. of page 5)

SECTION 9: Physical and ch	nemical properties
• 9.1 Information on basic physical a	and chemical properties
· General Information	
· Appearance:	
Form:	Fluid
Colour:	Colourless
	Yellowish
· Odour:	Characteristic
· Odour threshold:	Not determined.
· pH-value:	Not determined.
· Change in condition	
Melting point/Melting range:	Not determined
Boiling point/Boiling range:	$> 200 \ ^{\circ}C$
· Flash point:	> 100 °C
· Inflammability (solid, gaseous)	Not applicable.
· Ignition temperature:	397 °C
• Decomposition temperature:	Not determined.
· Self-inflammability:	Product is not selfigniting.
• Danger of explosion:	Product is not explosive.
· Critical values for explosion:	
Lower:	1.3 Vol %
Upper:	13.0 Vol %
· Vapour pressure at 20 °C:	0.1 hPa
· Density at 20 °C	1.13 g/cm^3
· Relative density	Not determined.
· Vapour density	Not determined.
· Evaporation rate	Not determined.
· Solubility in / Miscibility with	
Water:	Fully miscible
· Partition coefficient (n-octanol/wat	ter): Not determined.
· Viscosity:	
dynamic at 20 °C:	750 mPas
kinematic:	Not determined.
· Solvent content:	
Organic solvents:	0.0 %
• 9.2 Other information	No further relevant information available.

SECTION 10: Stability and reactivity

· 10.1 Reactivity

· 10.2 Chemical stability

- Thermal decomposition / conditions to be avoided: No decomposition if used according to specifications.
- · 10.3 Possibility of hazardous reactions none, if used as directed
- 10.4 Conditions to avoid No further relevant information available.

• 10.5 Incompatible materials:

strong acids strong bases

strong oxidizing agents

GB

Printing date 01.06.2015

*

Revision: 05.02.2015

(Contd. of page 6)

Trade name: ROMPOX Flexfuge Comp. A

• 10.6 Hazardous decomposition products: none, if stored and handled correctly.

11.1 InformationAcute toxicitLD/LC50 val25068-38-6 mOralLDermalL28064-14-4 mOralLDermalLDermalLDermalLDermalLDermalLDermalLDermalLDermalL	ation on ity alues that reaction weight = LD50 NOAEL LD50 reaction LD50 LD50	oxicological information a toxicological effects at are relevant for classification: a product: bisphenol-A-(epichlorhydrin) epoxy resin (number average molecular = 700) 15000 mg/kg (rat) 50 mg/kg/d (rat) 23000 mg/kg (rab) a product: bisphenol-F-(epichlorhydrin) > 2000 mg/kg (rat) > 2000 mg/kg (rab)
· Acute toxicit · LD/LC50 val 25068-38-6 r V Oral L N Dermal L 28064-14-4 r Oral L Dermal L	ity ulues that reaction weight = LD50 NOAEL LD50 reaction LD50 LD50	t are relevant for classification: n product: bisphenol-A-(epichlorhydrin) epoxy resin (number average molecular = 700) 15000 mg/kg (rat) 50 mg/kg/d (rat) 23000 mg/kg (rab) n product: bisphenol-F-(epichlorhydrin) > 2000 mg/kg (rat)
· LD/LC50 val 25068-38-6 i 0 0ral L N Dermal L 28064-14-4 i 0ral L Dermal L	ilues that reaction weight = LD50 NOAEL LD50 reaction LD50 LD50	n product: bisphenol-A-(epichlorhydrin) epoxy resin (number average molecular = 700) 15000 mg/kg (rat) 50 mg/kg/d (rat) 23000 mg/kg (rab) n product: bisphenol-F-(epichlorhydrin) > 2000 mg/kg (rat)
25068-38-6 Oral L N Dermal L 28064-14-4 L Oral L Dermal L Dermal L	reaction weight = LD50 NOAEL LD50 reaction LD50 LD50	n product: bisphenol-A-(epichlorhydrin) epoxy resin (number average molecular = 700) 15000 mg/kg (rat) 50 mg/kg/d (rat) 23000 mg/kg (rab) n product: bisphenol-F-(epichlorhydrin) > 2000 mg/kg (rat)
Oral L N Dermal L 28064-14-4 Oral L Dermal L	weight = LD50 NOAEL LD50 reaction LD50 LD50	= 700) 15000 mg/kg (rat) 50 mg/kg/d (rat) 23000 mg/kg (rab) a product: bisphenol-F-(epichlorhydrin) > 2000 mg/kg (rat)
N Dermal L 28064-14-4 Oral L Dermal L	NOAEL LD50 reaction LD50 LD50	50 mg/kg/d (rat) 23000 mg/kg (rab) a product: bisphenol-F-(epichlorhydrin) > 2000 mg/kg (rat)
Dermal L 28064-14-4 I Oral L Dermal L	LD50 reaction LD50 LD50	23000 mg/kg (rab) product: bisphenol-F-(epichlorhydrin) > 2000 mg/kg (rat)
28064-14-4 1 Oral L Dermal L	reaction LD50 LD50	<pre>product: bisphenol-F-(epichlorhydrin) > 2000 mg/kg (rat)</pre>
Oral L Dermal L	LD50 LD50	> 2000 mg/kg (rat)
Dermal L	LD50	
		> 2000 mg/kg (rab)
26761-45-5	C1	~ 2000 mg/kg (100)
	Giyciayi	l neodecanoate
Oral L	LD50	9600 mg/kg (rat)
Dermal L	LD50	3800 mg/kg (rat)
Inhalative L		> 5000 mg/m3 (rat) (LC50 (4h))
9003-36-5 B	Bispheno	l F epoxy resin
Oral L	LD50	> 5000 mg/kg (rat)
100-51-6 Bei	enzyl alc	ohol
Oral L	LD50	1040 mg/kg (rat)
Dermal L	LD50	2000 mg/kg (rbt) (RTECS)
Inhalative L	LD50	> 4178 mg/l (rat) (LC50 (4h))
16096-31-4	Hexane	dioldigycidyl ether
Oral L	LD50	8500 mg/kg (rat)
Dermal L	LD50	< 4900 mg/kg (rab)
		> 4900 mg/kg (rat)
 Serious eye a Respiratory a Additional to 	ion/irrita damage or skin oxicolog	ect: ution Irritant to skin and mucous membranes. /irritation Irritant effect. sensitisation Sensitization possible by skin contact. gical information: s the following dangers according to the calculation method of the General EC

Irritant

• CMR effects (carcinogenity, mutagenicity and toxicity for reproduction) Muta. 2

SECTION 12: Ecological	linformation
------------------------	--------------

· 12.1 Toxicity

· Aquatic toxicity:

25068-38-6 reaction product: bisphenol-A-(epichlorhydrin) epoxy resin (number average molecular weight = 700)

Algentoxizität / Algae toxicity220 mg/l (Alge) (LC50 (96h))Daphnientoxizität / Daphnia toxicity2.8 mg/l (Daphnia magna) (LC50 (48h))

(Contd. on page 8)

GB

Printing date 01.06.2015

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. A

Fischtoxizität / Fish toxicity	(Contd. of page 3.6 mg/l (Leuciscus idus) (LC50 (96h))
NOEC	4.2 mg/l (Alge) (72h)
28064-14-4 reaction product: bisphe	
Algentoxizität / Algae toxicity	> 1 - < 10 mg/l (Grünalge)
26761-45-5 Glycidyl neodecanoate	
Algentoxizität / Algae toxicity	10 mg/l (Grünalge) (EC50 (96h))
Daphnientoxizität / Daphnia toxicity	
Fischtoxizität / Fish toxicity	9.6 mg/l (Goldorfe (Leuciscus idus)) (LC50 (96h))
Toxizität / Toxicity	1 <lc (wirbellose="" ec="" ic50<10="" l="" mg="" td="" tiere)<=""></lc>
9003-36-5 Bisphenol F epoxy resin	
Daphnientoxizität / Daphnia toxicity	2 mg/l (daphnia) (EC50 (24h))
Fischtoxizität / Fish toxicity	2 mg/l (fish)
100-51-6 Benzyl alcohol	
Algentoxizität / Algae toxicity	79 mg/l (Scenedesmus quadicauda) (EC50 (3h))
	770 mg/l (Alge) (ErC50 (72h))
	640 mg/l (Scenedesmus subspicatus) (EC50 (96h))
BSB-5	1550 mg O2/g (-)
BSB5-Wert	1.55 g/g (-)
Bakterientoxizität / Bacteria toxicity	71.4 mg/l (Photobacterium phosphoreum) (EC50 (30 min); IUCLID)
	> 658 mg/l (Pseudomonas putida) (EC50 (16h))
Daphnientoxizität / Daphnia toxicity	400 mg/l (daphnia) (EC50 (24h); IUCLID)
	230 mg/l (Daphnia magna) (EC50 (48h))
Fischtoxizität / Fish toxicity	460 mg/l (Pimephales promelas) (LC50 (96h))
	645 mg/l (Goldorfe (Leuciscus idus)) (LC50 (96h))
closed bottel test	90 % (-)
16096-31-4 Hexanedioldigycidyl eth	ler er
Daphnientoxizität / Daphnia toxicity	47 mg/l (daphnia) (EC50 (24))
Fischtoxizität / Fish toxicity	30 mg/l (Onchorhynchus mykiss) (LC50 (96h))
	17.1 - 30.9 mg/l (Brachydanio rerio) (LC50 (96h))
12.2 Persistence and degradability N	No further relevant information available.
	urther relevant information available.
12.4 Mobility in soil No further relev	ant information available.
<i>Ecotoxical effects:</i> Not determined <i>Remark:</i> Toxic for fish	
Additional ecological information:	
General notes:	
Water hazard class 2 (German Regul	lation) (Self-assessment): hazardous for water.
	d water, water bodies or sewage system.
Danger to drinking water if even sma	
Also poisonous for fish and plankton	in water bodies.
Toxic for aquatic organisms 12.5 Results of PBT and vPvB asses	smont
<i>PBT:</i> Not applicable.	sinem
<i>vPvB:</i> Not applicable.	

(Contd. on page 9)

Printing date 01.06.2015

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. A

(Contd. of page 8)

GE

SECTION 13: Disposal considerations

· 13.1 Waste treatment methods

• Recommendation For disposal, local regulations issued by the authorities must be observed.

· European waste catalogue

08 00 00 WASTES FROM THE MANUFACTURE, FORMULATION, SUPPLY AND USE (MFSU) OF COATINGS (PAINTS, VARNISHES AND VITREOUS ENAMELS), ADHESIVES, SEALANTS AND PRINTING INKS

08 02 00 wastes from MFSU of other coatings (including ceramic materials)

08 02 99 wastes not otherwise specified

· Uncleaned packagings:

• Recommendation: Disposal must be made according to official regulations.

SECTION 14: Transport informa	tion
14.1 UN-Number ADR, IMDG, IATA	UN3082
- 14.2 UN proper shipping name - ADR	3082 ENVIRONMENTALLY HAZARDOUS SUBSTANCE LIQUID, N.O.S. (epoxy resin)
IMDG	ENVIRONMENTALLY HAZARDOUS SUBSTANCE LIQUID, N.O.S. (epoxy resin), MARINE POLLUTANT
·IATA	ENVIRONMENTALLY HAZARDOUS SUBSTANCE LIQUID, N.O.S. (epoxy resin)
14.3 Transport hazard class(es)	
ADR	
Class Label	9 (M6) Miscellaneous dangerous substances and articles. 9
IMDG, IATA	
· Class · Label	9 Miscellaneous dangerous substances and articles. 9
14.4 Packing group	
· ADR, IMDG, IATA	111
14.5 Environmental hazards:	Product contains environmentally hazardous substances epoxy resin
Marine pollutant:	Yes Symbol (fish and tree)
· Special marking (ADR):	Symbol (fish and tree)
	Symbol (fish and tree)
Special marking (IATA):	Symbol (fish and free)

Printing date 01.06.2015

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. A

	(Contd. of page 9
· Kemler Number:	90
· EMS Number:	F-A,S-F
· 14.7 Transport in bulk according to Anne.	x II of
MARPOL73/78 and the IBC Code	Not applicable.
· Transport/Additional information:	
· ADR	
\cdot Excepted quantities (EQ):	<i>E1</i>
\cdot Limited quantities (LQ)	5L
\cdot Excepted quantities ($\widetilde{E}Q$)	Code: E1
· · · · · · · · · · · · · · · · · · ·	Maximum net quantity per inner packaging: 30 ml
	Maximum net quantity per outer packaging: 1000 ml
· Transport category	3
• Tunnel restriction code	E
· IMDG	
\cdot Limited quantities (LQ)	5L
\cdot Excepted quantities (\widetilde{EQ})	Code: El
1 1 (2)	Maximum net quantity per inner packaging: 30 ml
	Maximum net quantity per outer packaging: 1000 ml
· UN "Model Regulation":	UN3082, ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S. (epoxy resin), 9, III

.

SECTION 15: Regulatory information

· 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

· National regulations

• Technical instructions (air):

· VOC EU % 10.00 %

· Water hazard class: Water hazard class 2 (Self-assessment): hazardous for water.

• 15.2 Chemical safety assessment: A Chemical Safety Assessment has not been carried out.

SECTION 16: Other information

These data are based on our present knowledge. However, they shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship. Changes made since last issue dated 14.01.2013 at the following points: *

Relevant phrases

H302 Harmful if swallowed.

H315 Causes skin irritation.

- H317 May cause an allergic skin reaction.
- H318 Causes serious eye damage.
- H319 Causes serious eye irritation.
- H332 Harmful if inhaled.
- H341 Suspected of causing genetic defects.
- H411 Toxic to aquatic life with long lasting effects.
- H412 Harmful to aquatic life with long lasting effects.

· Department issuing data specification sheet:

IGG-AD Ingenieurbüro für Gefahrstoff- und Gefahrgutberatung Bismarckstraße 10 D-68623 Lampertheim Fax: 0049-(0)6206-58422 http://www.igg-ad.de info@igg-ad.de


(Contd. on page 11)

GB

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. A

Contact:	(Contd. of page 1)
Dr. U. Prinz (u.prinz@igg-ad.de)	
DiplChem. H. Hinse (heidrun.hinse@igg-ad.de)	
Abbreviations and acronyms:	
	archandises dangereuses par chemin de fer (Regulations Concerning to
International Transport of Dangerous Goods by Rail)	archanaises aangereuses par chemin de jer (Regulations Concerning i
ICAO: International Civil Aviation Organisation	
	ingereuses par Route (European Agreement concerning the Internation
Carriage of Dangerous Goods by Road)	ingereuses pur Koule (European Agreement concerning the Internation
IMDG: International Maritime Code for Dangerous Goods	
IATA: International Air Transport Association	
GHS: Globally Harmonised System of Classification and Lab	elling of Chemicals
EINECS: European Inventory of Existing Commercial Chemi	
ELINCS: European List of Notified Chemical Substances	<i>Substances</i>
CAS: Chemical Abstracts Service (division of the American C	hemical Society)
DNEL: Derived No-Effect Level (REACH)	nemical sectory)
PNEC: Predicted No-Effect Concentration (REACH)	
LC50: Lethal concentration, 50 percent	
LD50: Lethal dose, 50 percent	
Acute Tox. 4: Acute toxicity, Hazard Category 4	
Skin Irrit. 2: Skin corrosion/irritation, Hazard Category 2	
Eye Dam. 1: Serious eye damage/eye irritation, Hazard Cates	gory 1
Eye Irrit. 2: Serious eye damage/eye irritation, Hazard Categ	ory 2
Skin Sens. 1: Sensitisation - Skin, Hazard Category 1	
Muta. 2: Germ cell mutagenicity, Hazard Category 2	
Aquatic Chronic 2: Hazardous to the aquatic environment - C	Chronic Hazard, Category 2
Aquatic Chronic 3: Hazardous to the aquatic environment - C	Chronic Hazard, Category 3
* Data compared to the previous version altered.	

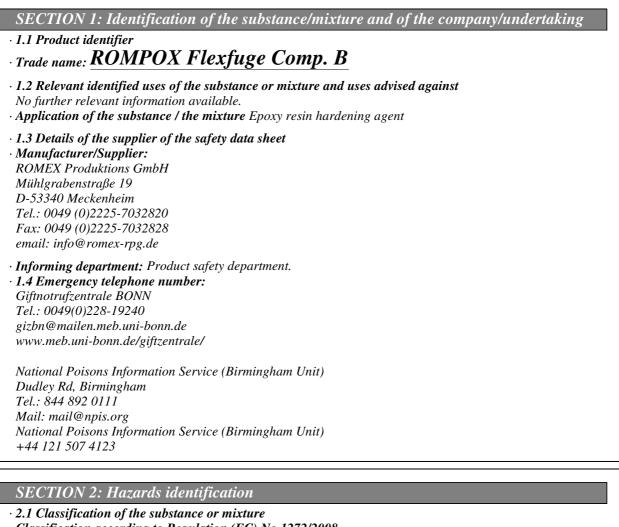

· Classification acco	ording i	to Regulation (EC) No 1272/2008
Acute Tox. 4	H302	Harmful if swallowed.
Acute Tox. 4	H332	Harmful if inhaled.
Skin Corr. 1A	H314	Causes severe skin burns and eye damage.
Eye Dam. 1	H318	Causes serious eye damage.
Skin Sens. 1	H317	May cause an allergic skin reaction.
Aquatic Chronic 3	H412	Harmful to aquatic life with long lasting effects.

· 2.2 Label elements

· Labelling according to Regulation (EC) No 1272/2008

The product is classified and labelled according to the CLP regulation. • *Hazard pictograms*



· Signal word Danger

· Hazard-determining components of labelling:

Benzyl alcohol 3-aminomethyl-3,5,5-trimethylcyclohexylamine Decanoic acid, compds. with 1,3-benzenedimethanamine-bisphenol A - bisphenol-A diglycidyl etherdiethylenetriamine glycidyl Ph ether

(Contd. on page 2)

[–] GB

GB

Printing date 01.06.2015

Trade name: ROMPOX Flexfuge Comp. B

	(Contd. of page 1)
1,3-Cyclohexanedimethanamine	
Hazard statements	
H302+H332 Harmful if swallowed or if inhaled.	
H314 Causes severe skin burns and eye damage.	
H317 May cause an allergic skin reaction.	
H412 Harmful to aquatic life with long lasting effects.	
Precautionary statements	
P260 Do not breathe dust/fume/gas/mist/vapours/spray.	
P280 Wear protective gloves/protective clothing/eye protection/face protection.	
P303+P361+P353 IF ON SKIN (or hair): Take off immediately all contaminated clothing.	Rinse skin with
water/shower.	
P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove co	ontact lenses, if
present and easy to do. Continue rinsing.	
P310 Immediately call a POISON CENTER/doctor.	
P321 Specific treatment (see on this label).	
P301+P312 IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell.	
P405 Store locked up.	
P501 Dispose of contents/container in accordance with local/regional/national	ıl/international
regulations.	
2.3 Other hazards	
Results of PBT and vPvB assessment	

• *PBT:* Not applicable. • *vPvB:* Not applicable.

SECTION 3: Composition/information on ingredients

· 3.2 Chemical characterisation: Mixtures

· Description: Epoxy resin hardening agent, formulation on aliphatic polyamine basis

CAS: 100-51-6	Benzyl alcohol	10-25%
EINECS: 202-859-9 Index number: 603-057-00-5 Reg.nr.: 01-2119492630-38-xxxx	1 Acute Tox. 4, H302; Acute Tox. 4, H332	
CAS: 2855-13-2 EINECS: 220-666-8 Index number: 612-067-00-9 Reg.nr.: 01-2119514687-32-xxxx	3-aminomethyl-3,5,5-trimethylcyclohexylamine Skin Corr. IB, H3I4; Acute Tox. 4, H302; Acute Tox. 4, H312; Skin Sens. 1, H317; Aquatic Chronic 3, H412	10-25%
CAS: 260549-92-6 Polymer	Decanoic acid, compds. with 1,3-benzenedimethanamine- bisphenol A - bisphenol-A diglycidyl etherdiethylenetriamine glycidyl Ph ether Ø Eye Dam. 1, H318	10-25%
CAS: 61788-44-1 EINECS: 262-975-0 Reg.nr.: 02-2119629611-43-xxxx	Phenol, styrenated Aquatic Chronic 2, H411; (1) Skin Irrit. 2, H315; Skin Sens. 1, H317	2.5-10%
CAS: 97043-91-9 Polymer	Alcohols, C9-16, ethoxylated	2.5-10%
CAS: 2579-20-6 EINECS: 219-941-5 Reg.nr.: 01-2119543741-41-xxxx	1,3-Cyclohexanedimethanamine Skin Corr. 1A, H314; () Acute Tox. 4, H302; Acute Tox. 4, H312; Acute Tox. 4, H332	2.5-10%
CAS: 71302-91-5 Polymer	Hydrocarbons, C-9 unsaturated, polymers with phenols	2.5-10%

Printing date 01.06.2015

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. B

	(Con	td. of page 2)
CAS: 90-72-2	2,4,6-tris(dimethylaminomethyl)phenol	2.5-10%
EINECS: 202-013-9 Index number: 603-069-00-0 Reg.nr.: 01-2119560597-27-xxxx	() Acute Tox. 4, H302; Skin Irrit. 2, H315; Eye Irrit. 2, H319	
CAS: 10563-29-8 EINECS: 234-148-4 Reg.nr.: 01-2119970376-29-xxxx	N'-(3-aminopropyl)-N,N-dimethylpropane-1,3-diamine Skin Corr. 1A, H314; (1) Acute Tox. 4, H302; Acute Tox. 4, H312; Skin Sens. 1, H317	< 2.5%
CAS: 13897-55-7 EINECS: 237-666-9	4-methylcyclohexane-1,3-diamine Skin Corr. 1B, H314; 🔷 Acute Tox. 4, H302	< 2.5%
CAS: 1477-55-0 EINECS: 216-032-5 Reg.nr.: 01-2119480150-50-xxx	m-phenylenebis(methylamine) Skin Corr. IB, H3I4; () Acute Tox. 4, H302; Acute Tox. 4, H332; Skin Sens. 1, H317; Aquatic Chronic 3, H412	< 2.5%
• Additional information For the w	ording of the listed risk phrases refer to section 16.	

SECTION 4: First aid measures

• 4.1 Description of first aid measures

- · General information Instantly remove any clothing soiled by the product.
- After inhalation
- *Take affected persons into the open air and position comfortably Seek medical treatment in case of complaints.*
- · After skin contact
- Instantly wash with water and soap and rinse thoroughly.
- If skin irritation continues, consult a doctor.
- · After eye contact Rinse opened eye for several minutes under running water. Then consult doctor.
- · After swallowing Drink copious amounts of water and provide fresh air. Instantly call for doctor.
- 4.2 Most important symptoms and effects, both acute and delayed No further relevant information available.
- Information for doctor No particular measures are known treat according to symptoms.
- \cdot 4.3 Indication of any immediate medical attention and special treatment needed
- No further relevant information available.

SECTION 5: Firefighting measures

- · 5.1 Extinguishing media
- · Suitable extinguishing agents
- CO2, extinguishing powder or water jet. Fight larger fires with water jet or alcohol-resistant foam.
- · For safety reasons unsuitable extinguishing agents Water with a full water jet.
- · 5.2 Special hazards arising from the substance or mixture
- Formation of toxic gases is possible during heating or in case of fire.
- · 5.3 Advice for firefighters
- · Protective equipment: Wear self-contained breathing apparatus.
- · Additional information

Dispose of fire debris and contaminated fire fighting water in accordance with official regulations.

SECTION 6: Accidental release measures

- 6.1 Personal precautions, protective equipment and emergency procedures Ensure adequate ventilation Wear protective clothing.
- 6.2 Environmental precautions: Do not allow product to reach sewage system or water bodies. Do not allow to enter the ground/soil.
- 6.3 Methods and material for containment and cleaning up: Absorb with liquid-binding material (sand, diatomite, acid binders, universal binders, sawdust).

(Contd. on page 4)

GB

Printing date 01.06.2015

Revision: 05.02.2015

(Contd. of page 3)

Trade name: ROMPOX Flexfuge Comp. B

Dispose of contaminated material as waste according to item 13. Ensure adequate ventilation. • 6.4 Reference to other sections

See Section 8 for information on personal protection equipment.

Clean the accident area carefully.

SECTION 7: Handling and storage

· 7.1 Precautions for safe handling

The usual precautionary measures for handling chemicals must be observed. Ensure good ventilation/exhaustion at the workplace.

• Information about protection against explosions and fires: No special measures required.

- · 7.2 Conditions for safe storage, including any incompatibilities
- · Storage
- *Requirements to be met by storerooms and containers:* Store only in unopened original containers. Provide floor trough without outlet.

· Information about storage in one common storage facility: Store away from foodstuffs.

- Further information about storage conditions: Store in cool, dry conditions in well sealed containers.
- · Storage class 8 A
- 7.3 Specific end use(s) No further relevant information available.

SECTION 8: Exposure controls/personal protection

• Additional information about design of technical systems: No further data; see item 7.

· 8.1 Control parameters

· Components with limit values that require monitoring at the workplace:

The product does not contain any relevant quantities of materials with critical values that have to be monitored at the workplace.

100-51-61	3enzyl alcohol	
Oral	DNEL Langzeit Verbraucher / Long-term consumer	5 mg/kg/bw/d (-)
Dermal	DNEL - Arbeiter / worker	9.5 mg/kg/bw/d (-) ((langfristig))
	DNEL Langzeit Verbraucher / Long-term consumer	5.7 mg/kg/bw/d (-)
Inhalative	DNEL - Arbeiter / worker	90 mg/m³(-)((langfristig))
	DNEL Langzeit Verbraucher / Long-term consumer	5.7 mg/m3 (-)
2855-13-2	3-aminomethyl-3,5,5-trimethylcyclohexylamine	
Inhalative	DNEL - Arbeiter / worker	20.1 mg/m ³ (-)
90-72-2 2,	4,6-tris(dimethylaminomethyl)phenol	
Inhalative	DNEL - Arbeiter / worker	0.31 mg/m ³ (-)
PNECs		
100-51-61	Benzyl alcohol	
PNEC Lan	gzeit Wasser / Long-term water 1 mg/l (Frischwasse	r (freshwater))
	0.1 mg/l (Meerwasse	er (seawater))
2855-13-2	3-aminomethyl-3,5,5-trimethylcyclohexylamine	
PNEC Lan	gzeit Wasser / Long-term water 0.06 mg/l (Frischwa	sser (freshwater))
	0.006 mg/l (Meerwa	sser (seawater))

GB -

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. B

(Contd. of page 4) · 8.2 Exposure controls · Personal protective equipment · General protective and hygienic measures Keep away from foodstuffs, beverages and food. Take off immediately all contaminated clothing Store protective clothing separately. Wash hands during breaks and at the end of the work. Avoid contact with the eyes and skin. • Breathing equipment: Use breathing protection in case of insufficient ventilation. · Recommended filter device for short term use: Filter AX · Protection of hands: Only use chemical-protective gloves with CE-labelling of category III. To minimise the wetness in the glove due to perspiration changing of gloves during a shift is required. *Check the permeability prior to each anewed use of the glove.* Preventive skin protection by use of skin-protecting agents is recommended. · Material of gloves Nitrile rubber, NBR Fluorocarbon rubber (Viton) *Recommended thickness of the material:* ≥ 0.5 *mm* The selection of the suitable gloves does not only depend on the material, but also on further marks of quality and varies from manufacturer to manufacturer. As the product is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application. · Penetration time of glove material The exact break trough time has to be found out by the manufacturer of the protective gloves and has to be observed. • As protection from splashes gloves made of the following materials are suitable: PVC gloves • Not suitable are gloves made of the following materials: Strong gloves Leather gloves · Eye protection: Tightly sealed safety glasses. · Body protection: Protective work clothing. **SECTION 9: Physical and chemical properties** · 9.1 Information on basic physical and chemical properties · General Information · Appearance: Form: Fluid Colour: Yellowish · Odour: Amine-like · Odour threshold: Not determined.

(Contd. on page 6)

GB

Printing date 01.06.2015

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. B

		(Contd. of page 5)
· pH-value:	Not determined.	
• Change in condition Melting point/Melting range: Boiling point/Boiling range:	Not determined Not determined	
· Flash point:	> 100 °C	
· Inflammability (solid, gaseous)	Not applicable.	
· Ignition temperature:	380 °C	
· Decomposition temperature:	Not determined.	
· Self-inflammability:	Product is not selfigniting.	
· Danger of explosion:	Product is not explosive.	
· Critical values for explosion: Lower: Upper:	1.2 Vol % 13.0 Vol %	
· Vapour pressure at 20 °C:	0.1 hPa	
 Density at 20 °C Relative density Vapour density Evaporation rate 	1.029 g/cm ³ Not determined. Not determined. Not determined.	
· Solubility in / Miscibility with Water:	Fully miscible	
\cdot Partition coefficient (n-octanol/water)	: Not determined.	
 Viscosity: dynamic at 20 °C: kinematic: 	670 mPas Not determined.	
 Solvent content: Organic solvents: 9.2 Other information 	0.0 % No further relevant information available.	

SECTION 10: Stability and reactivity

· 10.1 Reactivity

· 10.2 Chemical stability

- Thermal decomposition / conditions to be avoided: No decomposition if used according to specifications.
- · 10.3 Possibility of hazardous reactions none, if used as directed
- · 10.4 Conditions to avoid No further relevant information available.
- · 10.5 Incompatible materials: strong oxidizing agents
- · 10.6 Hazardous decomposition products:

none, if stored and handled correctly.

in the event of fire:

toxic gases and vapours

(Contd. on page 7)

GB

Printing date 01.06.2015

*

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. B

(Contd. of page 6)

LD/LC50	values that are relevant for classificat	tion:
100-51-61	Benzyl alcohol	
Oral	LD50	1040 mg/kg (rat)
Dermal	LD50	2000 mg/kg (rbt) (RTECS)
Inhalative	LD50	> 4178 mg/l (rat) (LC50 (4h))
2855-13-2	3-aminomethyl-3,5,5-trimethylcycloh	iexylamine
Oral	LD50	1030 mg/kg (rat)
	NOEL Teratogenität / Teratogenicity	250 mg/kg (rat)
	NOEL maternal	50 mg/kg (rat)
Dermal	LD50	> 2000 mg/kg (rat) (OECD TG 402)
		1840 mg/kg (rab)
Inhalative	LC50/4 h	> 5.01 mg/l (rat) (OECD TG 403)
61788-44-	1 Phenol, styrenated	
Oral	LD50	> 2000 mg/kg (rat)
Dermal	LD50	> 2000 mg/kg (rat)
97043-91-	9 Alcohols, C9-16, ethoxylated	
Oral	LD50	>300 mg/kg (rat)
2579-20-6	1,3-Cyclohexanedimethanamine	
Dermal	LD50	1700 mg/kg (rab)
71302-91-	5 Hydrocarbons, C-9 unsaturated, poly	mers with phenols
Dermal	LD50	ca.10000 mg/kg (rat)
90-72-2 2,	4,6-tris(dimethylaminomethyl)phenol	
Oral	LD50	1670 mg/kg (rat)
Dermal	LD50	1242 mg/kg (rab)
10563-29-	8 N'-(3-aminopropyl)-N,N-dimethylp	ropane-1,3-diamine
Oral	LD50	681 - 2000 mg/kg (rat)
Dermal	LD50	1310 mg/kg (rat)
Skin corro Serious ey Respirator Additiona The prod	rritant effect: osion/irritation Caustic effect on skin a ne damage/irritation Strong caustic effe ry or skin sensitisation Sensitization po I toxicological information: uct shows the following dangers a tion Guidelines for Preparations as issu	ect. ossible by skin contact. according to the calculation method of the Genera

Swallowing will lead to a strong caustic effect on mouth and throat and to the danger of perforation of esophagus and stomach.

(Contd. on page 8)

- GB -

Printing date 01.06.2015

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. B

(Contd. of page 7)

12.1 Toxicity	
Aquatic toxicity:	
100-51-6 Benzyl alcohol	
Algentoxizität / Algae toxicity	79 mg/l (Scenedesmus quadicauda) (EC50 (3h))
	770 mg/l (Alge) (ErC50 (72h))
	640 mg/l (Scenedesmus subspicatus) (EC50 (96h))
BSB-5	1550 mg O2/g (-)
BSB5-Wert	1.55 g/g (-)
Bakterientoxizität / Bacteria toxicity	71.4 mg/l (Photobacterium phosphoreum) (EC50 (30 min); IUCLID,
	> 658 mg/l (Pseudomonas putida) (EC50 (16h))
Daphnientoxizität / Daphnia toxicity	400 mg/l (daphnia) (EC50 (24h); IUCLID)
	230 mg/l (Daphnia magna) (EC50 (48h))
Fischtoxizität / Fish toxicity	460 mg/l (Pimephales promelas) (LC50 (96h))
	645 mg/l (Goldorfe (Leuciscus idus)) (LC50 (96h))
closed bottel test	90 % (-)
2855-13-2 3-aminomethyl-3,5,5-trin	nethylcyclohexylamine
Algentoxizität / Algae toxicity	50 mg/l (Scenedesmus subspicatus) (EC50 (72h))
Bakterientoxizität / Bacteria toxicity	1120 mg/l (Pseudomonas putida) (EC10 (18h))
Daphnientoxizität / Daphnia toxicity	23 mg/l (Daphnia magna) (EC50 (48h))
Fischtoxizität / Fish toxicity	110 mg/l (Brachydanio rerio) (LC50 (96h))
LC0 (96h)	70 mg/l (Brachydanio rerio)
NOEC	(504h) 3 mg/l (Daphnia magna)
	(72h) 1.5 mg/l (Scenedesmus subspicatus)
61788-44-1 Phenol, styrenated	
Algentoxizität / Algae toxicity	3.14 mg/l (Scenedesmus subspicatus) (EL50 (72h))
	1 - 10 mg/l (Daphnia magna) (EL50 (48h))
Fischtoxizität / Fish toxicity	14.8 mg/l (fish) (LL50 (96h))
97043-91-9 Alcohols, C9-16, ethoxy	
BSB-5	774 mg O2/g () (EN 1899-1)
CSB	1816 mg O2/g (-) (DIN 38409 H41)
Daphnientoxizität / Daphnia toxicity	
Fischtoxizität / Fish toxicity	4.3 mg/l (Goldorfe (Leuciscus idus)) (LC50 (48h))
2579-20-6 1,3-Cyclohexanedimetha	
EC50	90 mg/l (Pseudomonas putida)
LC50	130 mg/l (Goldorfe (Leuciscus idus))
90-72-2 2,4,6-tris(dimethylaminome	
· · · ·	750 mg/l (Mangrovenkrabbe (Neopanope)) (LC50 (96h))
Fischtoxizität / Fish toxicity	222 mg/l (Onchorhynchus mykiss) (LC50 (24h))
	718 mg/l (Cyprinus Carpio) (LC50 (96h))
10563-29-8 N'-(3-aminopropyl)-N,N	
Algentoxizität / Algae toxicity	181 mg/l (Pseudomonas putida) (EC50 (16h))
Bakterientoxizität / Bacteria toxicity	> 1000 mg/l (Belebtschlammbakterien) (EC20 (0,5h))
Fischtoxizität / Fish toxicity	220 mg/ (Leuciscus idus) (LC50 (96h))
12.2 Persistence and degradability N	-

Printing date 01.06.2015

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. B

	(Contd. of page
12.3 Bioaccumulative potential No further relevant information available.	(Conta: of page
12.4 Mobility in soil No further relevant information available.	
Ecotoxical effects: Not determined	
Remark: Very toxic for fish	
Additional ecological information:	
General notes:	
Water hazard class 2 (German Regulation) (Self-assessment): hazardous for water.	
Do not allow product to reach ground water, water bodies or sewage system.	
Must not reach sewage water or drainage ditch undiluted or unneutralised.	
Danger to drinking water if even small quantities leak into soil.	
Also poisonous for fish and plankton in water bodies.	
Very toxic for aquatic organisms	
12.5 Results of PBT and vPvB assessment	
PBT: Not applicable.	
vPvB: Not applicable.	
12.6 Other adverse effects No further relevant information available.	

SECTION 13: Disposal considerations

· 13.1 Waste treatment methods

· Recommendation Must be specially treated under adherence to official regulations.

· European waste catalogue

08 00 00 WASTES FROM THE MANUFACTURE, FORMULATION, SUPPLY AND USE (MFSU) OF COATINGS (PAINTS, VARNISHES AND VITREOUS ENAMELS), ADHESIVES, SEALANTS AND PRINTING INKS

08 02 00 wastes from MFSU of other coatings (including ceramic materials)

08 02 99 wastes not otherwise specified

· Uncleaned packagings:

• Recommendation: Disposal must be made according to official regulations.

SECTION 14: Transport information

· 14.1 UN-Number · ADR, IMDG, IATA	UN2735
· 14.2 UN proper shipping name	
·ADR	2735 AMINES, LIQUID, CORROSIVE, N.O.S. (ISOPHORONEDIAMINE, nonylphenol)
·IMDG	AMINES, LIQUID, CORROSIVE, N.O.S. (ISOPHORONEDIAMINE, nonylphenol), MARINE POLLUTANT
·IATA	AMINES, LIQUID, CORROSIVE, N.O.S. (ISOPHORONEDIAMINE, nonylphenol)
· 14.3 Transport hazard class(es)	
· ADR	
· Class	8 (C7) Corrosive substances.
	(Contd. on page 10)

Printing date 01.06.2015

Trade name: ROMPOX Flexfuge Comp. B

	(Contd. of page
Label	8
IMDG	
Class	8 Corrosive substances.
Label	8
· IATA	
Class	8 Corrosive substances.
Label	8
14.4 Packing group	
ADR, IMDG, IATA	111
14.5 Environmental hazards:	Product contains environmentally hazardous substance
Marine pollutant:	nonylphenol Yes Symbol (fish and tree)
Special marking (ADR):	Symbol (fish and tree)
14.6 Special precautions for user	Warning: Corrosive substances.
Kemler Number:	86
EMS Number:	F-A,S-B
Segregation groups	Alkalis
14.7 Transport in bulk according to Ann MARPOL73/78 and the IBC Code	ex II of Not applicable.
Transport/Additional information:	
· ADR	
Excepted quantities (EQ):	EI
Limited quantities (LQ)	5L
Excepted quantities (EQ)	Code: E1
	Maximum net quantity per inner packaging: 30 ml
T	Maximum net quantity per outer packaging: 1000 ml
Transport category	3 E
Tunnel restriction code	<i>E</i>
IMDG	51
Limited quantities (LQ)	5L
Excepted quantities (EQ)	Code: El
	Maximum net quantity per inner packaging: 30 ml Maximum net quantity per outer packaging: 1000 ml
UN "Model Regulation":	UN2735, AMINES, LIQUID, CORROSIVE, N.O.

(Contd. on page 11)

Trade name: ROMPOX Flexfuge Comp. B

(Contd. of page 10)

SECTION 15: Regulatory information

· 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

· National regulations

• Technical instructions (air):

· VOC EU % 0.00 %

· Water hazard class: Water hazard class 2 (Self-assessment): hazardous for water.

· 15.2 Chemical safety assessment: A Chemical Safety Assessment has not been carried out.

*

SECTION 16: Other information

These data are based on our present knowledge. However, they shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship. Changes made since last issue dated 14.01.2013 at the following points: * · Relevant phrases H302 Harmful if swallowed. H312 Harmful in contact with skin. H314 Causes severe skin burns and eye damage. H315 Causes skin irritation. H317 May cause an allergic skin reaction. H318 Causes serious eye damage. H319 Causes serious eye irritation. H332 Harmful if inhaled. H411 Toxic to aquatic life with long lasting effects. H412 Harmful to aquatic life with long lasting effects. · Department issuing data specification sheet: IGG-AD Ingenieurbüro für Gefahrstoff- und Gefahrgutberatung Bismarckstraße 10 D-68623 Lampertheim Fax: 0049-(0)6206-58422 http://www.igg-ad.de info@igg-ad.de · Contact: Dr. U. Prinz (u.prinz@igg-ad.de) Dipl.-Chem. H. Hinse (heidrun.hinse@igg-ad.de) · Abbreviations and acronyms: RID: Règlement international concernant le transport des marchandises dangereuses par chemin de fer (Regulations Concerning the International Transport of Dangerous Goods by Rail) ICAO: International Civil Aviation Organisation ADR: Accord européen sur le transport des marchandises dangereuses par Route (European Agreement concerning the International Carriage of Dangerous Goods by Road) IMDG: International Maritime Code for Dangerous Goods IATA: International Air Transport Association GHS: Globally Harmonised System of Classification and Labelling of Chemicals EINECS: European Inventory of Existing Commercial Chemical Substances ELINCS: European List of Notified Chemical Substances CAS: Chemical Abstracts Service (division of the American Chemical Society) DNEL: Derived No-Effect Level (REACH) PNEC: Predicted No-Effect Concentration (REACH) LC50: Lethal concentration, 50 percent LD50: Lethal dose, 50 percent Acute Tox. 4: Acute toxicity, Hazard Category 4 Skin Corr. 1A: Skin corrosion/irritation, Hazard Category 1A Skin Corr. 1B: Skin corrosion/irritation, Hazard Category 1B Skin Irrit. 2: Skin corrosion/irritation, Hazard Category 2 Eye Dam. 1: Serious eye damage/eye irritation, Hazard Category 1 Eye Irrit. 2: Serious eye damage/eye irritation, Hazard Category 2 Skin Sens. 1: Sensitisation - Skin, Hazard Category 1 Aquatic Chronic 2: Hazardous to the aquatic environment - Chronic Hazard, Category 2 Aquatic Chronic 3: Hazardous to the aquatic environment - Chronic Hazard, Category 3 • * Data compared to the previous version altered.

SECTION 1: Identification of the substance/mixture and of the company/undertaking · 1.1 Product identifier • Trade name: ROMPOX Flexfuge Comp. C · 1.2 Relevant identified uses of the substance or mixture and uses advised against No further relevant information available. · Application of the substance / the mixture Repair mortar \cdot 1.3 Details of the supplier of the safety data sheet · Manufacturer/Supplier: **ROMEX Produktions GmbH** Mühlgrabenstraße 19 D-53340 Meckenheim Tel.: 0049 (0)2225-7032820 Fax: 0049 (0)2225-7032828 email: info@romex-rpg.de · Informing department: Product safety department. · 1.4 Emergency telephone number: Giftnotrufzentrale BONN Tel.: 0049(0)228-19240 gizbn@mailen.meb.uni-bonn.de www.meb.uni-bonn.de/giftzentrale/ National Poisons Information Service (Birmingham Unit) Dudley Rd, Birmingham Tel.: 844 892 0111 Mail: mail@npis.org National Poisons Information Service (Birmingham Unit) +44 121 507 4123 **SECTION 2: Hazards identification**

· 2.1 Classification of the substance or mixture · Classification according to Regulation (EC) No 1272/2008 The product is not classified according to the CLP regulation.

· 2.2 Label elements

- · Labelling according to Regulation (EC) No 1272/2008 Void
- · Hazard pictograms Void
- · Signal word Void
- · Hazard statements Void
- Additional information:
- Safety data sheet available on request.
- · 2.3 Other hazards
- · Results of PBT and vPvB assessment
- · PBT: Not applicable.
- · vPvB: Not applicable.

SECTION 3: Composition/information on ingredients

- · 3.2 Chemical characterisation: Mixtures
- · Description: Mix of special sand and fillers
- · Dangerous components: Void
- · Additional information For the wording of the listed risk phrases refer to section 16.

SECTION 4: First aid measures

· 4.1 Description of first aid measures

· General information Instantly remove any clothing soiled by the product.

(Contd. on page 2)

GB

Printing date 01.06.2015

Revision: 05.02.2015

(Contd. of page 1)

Trade name: ROMPOX Flexfuge Comp. C

- After inhalation Supply fresh air; consult doctor in case of symptoms.
- · After skin contact

Instantly wash with water and soap and rinse thoroughly.

If skin irritation continues, consult a doctor.

• After eye contact Rinse opened eye for several minutes under running water. Then consult doctor.

· After swallowing Rinse the mouth with water immediately

- 4.2 Most important symptoms and effects, both acute and delayed No further relevant information available.
- · Information for doctor No particular measures are known treat according to symptoms.
- 4.3 Indication of any immediate medical attention and special treatment needed

No further relevant information available.

SECTION 5: Firefighting measures

- · 5.1 Extinguishing media
- Suitable extinguishing agents The product is not flammable
- · For safety reasons unsuitable extinguishing agents Not applicable
- · 5.2 Special hazards arising from the substance or mixture Not applicable
- 5.3 Advice for firefighters
- · Protective equipment: Wear self-contained breathing apparatus.

SECTION 6: Accidental release measures

- 6.1 Personal precautions, protective equipment and emergency procedures Avoid contact with eyes and skin. Wear protective clothing.
- 6.2 Environmental precautions: Do not allow to enter drainage system, surface or ground water. Do not allow to enter the ground/soil. Dilute with much water.

• 6.3 Methods and material for containment and cleaning up: Absorb with liquid-binding material (sand, diatomite, acid binders, universal binders, sawdust).

- 6.4 Reference to other sections No dangerous materials are released.
 See Section 7 for information on safe handling See Section 8 for information on personal protection equipment.
- See Section 13 for information on disposal.

SECTION 7: Handling and storage

• 7.1 Precautions for safe handling No special measures required.

• Information about protection against explosions and fires: No special measures required.

- · 7.2 Conditions for safe storage, including any incompatibilities
- · Storage
- Requirements to be met by storerooms and containers:

No special requirements.

- Do not store the product at temperatures below 0 $^{\circ}C$ or above 40 $^{\circ}C$.
- Information about storage in one common storage facility: Store away from foodstuffs.
- Further information about storage conditions: Protect from frost.
- · Storage class 10
- 7.3 Specific end use(s) No further relevant information available.

SECTION 8: Exposure controls/personal protection

• Additional information about design of technical systems: No further data; see item 7.

(Contd. on page 3)

GB -

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. C

(Contd. of page 2)

· 8.1 Control parameters · Components with limit values that require monitoring at the workplace: The product does not contain any relevant quantities of materials with critical values that have to be monitored at the workplace. • Additional information: The lists that were valid during the compilation were used as basis. · 8.2 Exposure controls · Personal protective equipment • General protective and hygienic measures Do not eat, drink or smoke while working. • Breathing equipment: Not required. • Protection of hands: Wear gloves for the protection against mechanical hazards according to EN 388. · Material of gloves The selection of the suitable gloves does not only depend on the material, but also on further marks of quality and varies from manufacturer to manufacturer. As the product is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application. · Penetration time of glove material The exact break trough time has to be found out by the manufacturer of the protective gloves and has to be observed.

- Eye protection: Not required.
- **Body protection:** Protective work clothing.

SECTION 9: Physical and chemical properties

General Information		
Appearance:		
Form:	Viscous	
Colour:	Different according to colour	
Odour:	Odourless	
Odour threshold:	Not determined.	
pH-value:	Not determined.	
Change in condition		
Melting point/Melting range:	Not determined	
Boiling point/Boiling range:	100 °C	
Flash point:	Not applicable	
Inflammability (solid, gaseous)	Not applicable.	
Ignition temperature:		
Decomposition temperature:	Not determined.	
Self-inflammability:	Product is not selfigniting.	
Danger of explosion:	Product is not explosive.	
Critical values for explosion:		
Lower:	Not determined.	
Upper:	Not determined.	
Vapour pressure at 20 °C:	23 hPa	
Density	Not determined	
Relative density	Not determined.	
Vapour density	Not determined.	
Evaporation rate	Not determined.	

Trade name: ROMPOX Flexfuge Comp. C

		(Contd. of page
· Solubility in / Miscibility with		
Water:	Fully miscible	
· Partition coefficient (n-octano	I/water): Not determined.	
· Viscosity:		
dynamic:	Not determined.	
kinematic:	Not determined.	
· Solvent content:		
Organic solvents:	0.0 %	
• 9.2 Other information	No further relevant information available.	

SECTION 10: Stability and reactivity

· 10.1 Reactivity

- · 10.2 Chemical stability
- Thermal decomposition / conditions to be avoided: No decomposition if used according to specifications.
- 10.3 Possibility of hazardous reactions none, if used as directed
- 10.4 Conditions to avoid No further relevant information available.
- 10.5 Incompatible materials: No further relevant information available.
- 10.6 Hazardous decomposition products: none, if stored and handled correctly.

SECTION 11: Toxicological information

- · 11.1 Information on toxicological effects
- · Acute toxicity
- · Primary irritant effect:
- · Skin corrosion/irritation No irritant effect.
- · Serious eye damage/irritation No irritant effect.
- · Respiratory or skin sensitisation No sensitizing effect known.
- · Additional toxicological information:

The product is not subject to classification according to the calculation method of the General EC Classification Guidelines for Preparations as issued in the latest version:

When used and handled according to specifications, the product does not have any harmful effects according to our experience and the information provided to us.

SECTION 12: Ecological information

· 12.1 Toxicity

- Aquatic toxicity: No further relevant information available.
- · 12.2 Persistence and degradability No further relevant information available.
- · 12.3 Bioaccumulative potential No further relevant information available.
- · 12.4 Mobility in soil No further relevant information available.
- · Ecotoxical effects: Not determined
- Additional ecological information:
- · General notes: Generally not hazardous for water.
- · 12.5 Results of PBT and vPvB assessment
- · **PBT:** Not applicable.
- · vPvB: Not applicable.
- 12.6 Other adverse effects No further relevant information available.

(Contd. on page 5)

Printing date 01.06.2015

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. C

(Contd. of page 4)

SECTION 13: Disposal considerations

· 13.1 Waste treatment methods

· Recommendation

For disposal, local regulations issued by the authorities must be observed. Smaller quantities can be disposed with household waste.

· European waste catalogue

06 00 00 WASTES FROM INORGANIC CHEMICAL PROCESSES

06 13 00 wastes from inorganic chemical processes not otherwise specified

06 13 99 wastes not otherwise specified

· Uncleaned packagings:

• *Recommendation: Disposal must be made according to official regulations.*

• Recommended cleaning agent: Water, if necessary with cleaning agent.

SECTION 14: Transport information		
· 14.1 UN-Number · ADR, ADN, IMDG, IATA	Void	
· 14.2 UN proper shipping name · ADR, ADN, IMDG, IATA	Void	
· 14.3 Transport hazard class(es)		
· ADR, ADN, IMDG, IATA · Class	Void	
· 14.4 Packing group · ADR, IMDG, IATA	Void	
· 14.5 Environmental hazards:	Not applicable.	
· 14.6 Special precautions for user	Not applicable.	
· 14.7 Transport in bulk according to Anne MARPOL73/78 and the IBC Code	ex II of Not applicable.	
· Transport/Additional information:	Not dangerous according to the above specifications.	
· UN "Model Regulation":	-	

SECTION 15: Regulatory information

· 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

· National regulations

· Water hazard class: Generally not hazardous for water.

• 15.2 Chemical safety assessment: A Chemical Safety Assessment has not been carried out.

SECTION 16: Other information

These data are based on our present knowledge. However, they shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship. Changes made since last issue dated 14.01.2013 at the following points: *

• Department issuing data specification sheet: IGG-AD Ingenieurbüro für Gefahrstoff- und Gefahrgutberatung Bismarckstraße 10

(Contd. on page 6)

Printing date 01.06.2015

Revision: 05.02.2015

Trade name: ROMPOX Flexfuge Comp. C

		(Contd. of page 5)			
D-68623 Lampertheim					
Fax: 0049-(0)6206-58422	http://www.igg-ad.de	info@igg-ad.de			
· Contact:					
Dr. U. Prinz (u.prinz@igg-aa	l.de)				
DiplChem. H. Hinse (heidru	n.hinse@igg-ad.de)				
· Abbreviations and acronyms	:				
ADR: Accord européen sur le transport des marchandises dangereuses par Route (European Agreement concerning the International					
Carriage of Dangerous Goods by Re	pad)				
IMDG: International Maritime Code	e for Dangerous Goods				
IATA: International Air Transport A	ssociation				
GHS: Globally Harmonised System of Classification and Labelling of Chemicals					
EINECS: European Inventory of Existing Commercial Chemical Substances					
ELINCS: European List of Notified	Chemical Substances				
CAS: Chemical Abstracts Service (division of the American Chemical Society)					
• * Data compared to the prev	ious version altered.	• *			
		GB			